

INDOOR PRODUCT

STEP LIGHT SERIES

Recessed LED wall Light with quality frame, low energy consumption with more more 50000Hs long life time, available with multiple beam angle options, equip with fire resistance PC diffuser, IP20 water proof excellent heat dissipation capability to minimize the luminous degradation,LED driver separately.




WN7646

Max 1.5W LED



Light source: SEOUL 3030 1x1W
 Beam angle: C0/180,65° C90/270,45°
 Color temperature: 3000K/4000K/5000K
 Light output: 85LM
 Color rendering index : Ra ≥ 80
 Operating temperature: -20°C~ +40°C
 Rated life hours: 30,000 - 50,000H
 LED driver (Remote): (CE)
 Input: 100-240V AC 50/60Hz
 LED-current: 170mA
 Power consumption :Max 1.5W






WN7647


Max 1.5W LED



Light source: SEOUL 3030 1x1W
 Beam angle: C0/180,65° C90/270,45°
 Color temperature: 3000K/4000K/5000K
 Light output: 85LM
 Color rendering index : Ra ≥ 80
 Operating temperature: -20°C~ +40°C
 Rated life hours: 30,000 - 50,000H
 LED driver (Remote): (CE)
 Input: 100-240V AC 50/60Hz
 LED-current: 170mA
 Power consumption :Max 1.5W

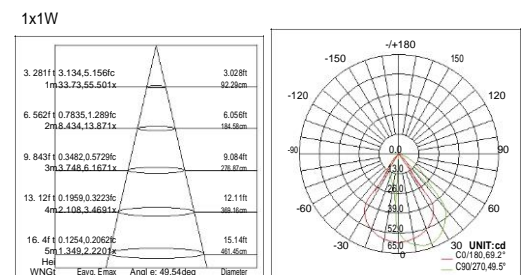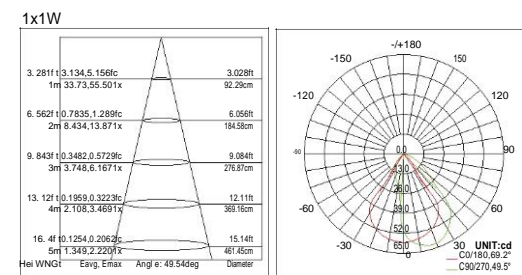






Power consumption	Max 4.5W
Color temperature	3000K/4000K/5000K
Light output	148LM
Power consumption	Max 1.5W
Color temperature	3000K/4000K/5000K
Light output	16LM
Color rendering index	Ra ≥ 80
Operating temperature	-20°C~ +40°C
Rated life hours	30,000 - 50,000H
LED Chip	



4.5W


WN76100



WN76101




WN7691




1.5W

WN7690




Accessories

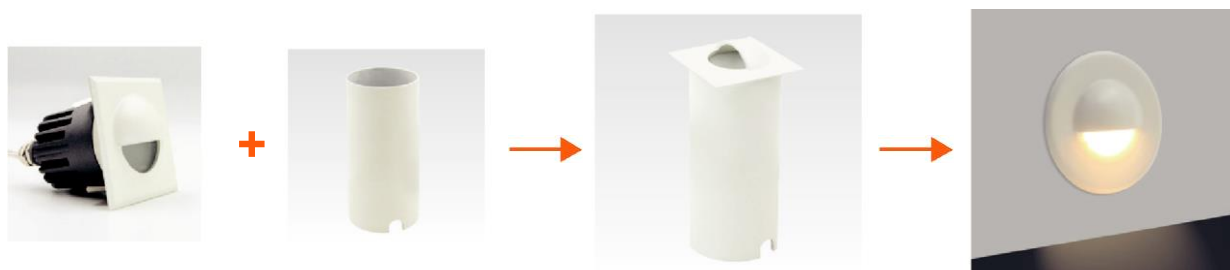



WNJT00006

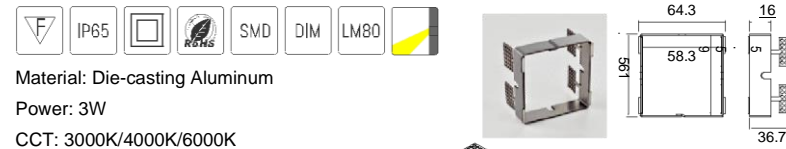


Material: Die-casting Aluminum
 Power: 3W
 CCT: 3000K/4000K/6000K
 Light output: 180lm/210lm/240lm
 Color rendering index: Ra≥80
 Driver: Intergrated LED driver
 Operating temperature: -20°C~40°C



Beam Angle:




WNZ0003

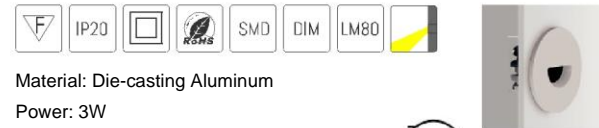

Material: Die-casting Aluminum
 Power: 3W
 CCT: 3000K/4000K/6000K
 Light output: 70lm/76lm/80lm
 Color rendering index: Ra≥80
 Driver: Intergrated LED driver
 Operating temperature: -20°C~40°C



Beam Angle:

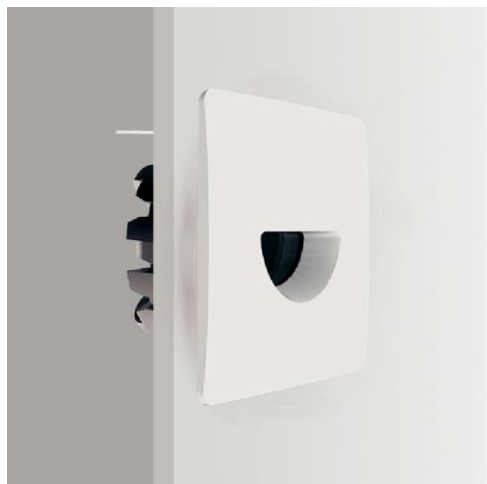

WNZ0002



Material: Die-casting Aluminum
 Power: 3W
 CCT: 3000K/4000K/6000K
 Light output: 70lm/76lm/80lm
 Color rendering index: Ra≥80
 Driver: Intergrated LED driver
 Operating temperature:- 20°C~40°C



Beam Angle:

