
# **INDOOR PRODUCT**

EMERGENCY LIGHT SERIES

www.wonygroup.com





CE

DESCRIPTION: • Aluminum frame&Acrylate legend. • Printing and engraving are preferable. • Adjustable length for drop sign chain. • Length of body can be adjustable. • OEM design for pictogram. • 24 hours charging time. • Working temperature: -5~40°C.



SPECIFICATION: Material: Aluminum frame&acrylate legend LED Lamp: LED SMD Battery: 2.4V 900mAh Ni-Cd Duration: 3 hours Charging time: 24 hours Driver: Built-in LED driver



## WNB219-HS

CE

DESCRIPTION: • Polycarbinate body PMMA acrylic legend. • Laser printing Technology. • Excellent Light Transmittence. • Dedicated for small and medium-siced public buildings. • Working temperature: -5-40°C.



#### SPECIFICATION: Material: Aluminum frame&acrylate legend LED Lamp: LED SMD Battery: 3.6V 900mAh Ni-Cd Duration: 3 hours Charging time: 24 hours Driver: Built-in LED driver




1



### WNB219-R DESCRIPTION:

DESCRIPTION:
Polycarbinate body PMMA acrylic legend.
Laser printing Technology.
Excellent Light Transmittence.
Dedicated for small and medium-siced public buildings.
Working temperature: -5-40°C.





45.9 39.3

SPECIFICATION: Material: Aluminum frame&acrylate legend LED Lamp: LED SMD


Battery: 3.6V 900mAh Ni-Cd Duration: 3 hours Charging time: 24 hours Driver: Built-in LED driver










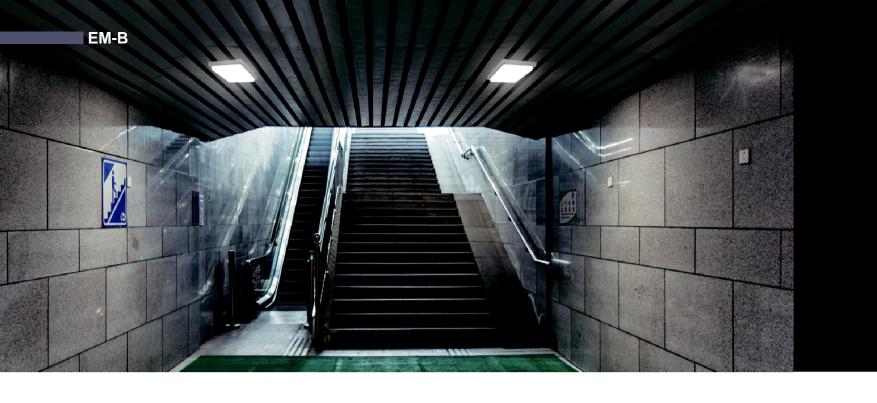



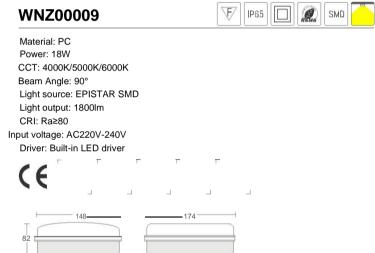





WNZ00	010		\[ \]	F/ IP65	SMD
Material: PC Power: 18W					
CCT: 4000K/	5000K/6000K				
Beam Angle:	90°				
Light source:	EPISTAR SN	٨D			
Light output:					
CRI: Ra≥80 F					
nput voltage: A					
Driver: Built-i					
<b>(</b> €	অ	ज ज	च		
	200		200		
61.5			-		





www.wonygroup.com

www.wonygroup.com

WNC306

• Metal housing and polycabonate lens.

On/Off button for lamp head.

DESCRIPTION:

Non-maintained.

#### F IP20 SMD - +

EM-C

SPECIFICATION: Material: Polycarbonate LED Lamp: LED SMD Battery: 3.6V 1800mAh Ni-Cd Duration: 3 hours Charging time: 24 hours Driver: Built-in LED driver

(6