

# OUTDOOR PRODUCT

POINT SOURCE LIGHT SERIES

**WNG00033**




Material: PC  
 Voltage: DC24V  
 Power: 0.8W  
 Light source: OSRAM 4040 4pcs  
 CCT: 3000K/RGB 3 in 1  
 Driver: Remote driver

Working temps: -20°C~45°C



Beam Angle:  
  
 120°-160°



**WNG00033-1**




Material: PC  
 Voltage: DC24V  
 Power: 1.44W  
 Light source: OSRAM 3535 6pcs  
 CCT: 3000K/RGB 3 in 1  
 Driver: Remote driver  
 Control mode: Switch/DMX512

Working temps: -20°C~45°C



Beam Angle:  
  
 120°-160°




**WNG00033-2**




Material: PC  
 Voltage: DC24V  
 Power: 1.44W  
 Light source: OSRAM 3535 6pcs  
 CCT: 3000K/RGB 3 in 1  
 Driver: Remote driver  
 Control mode: Switch/DMX512  
 Working temps: -20°C~45°C




Beam Angle:  
  
 120°-160°



**Circuit layout:**

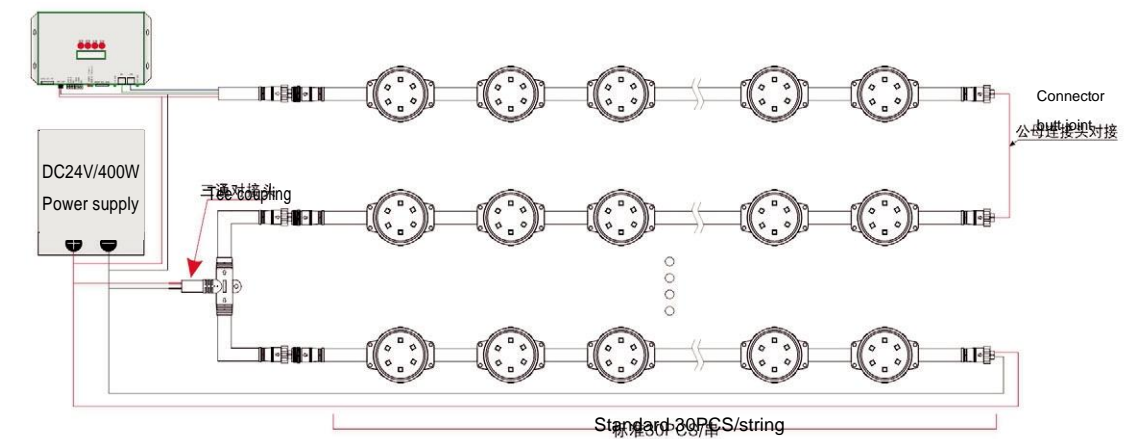

**Installation:**

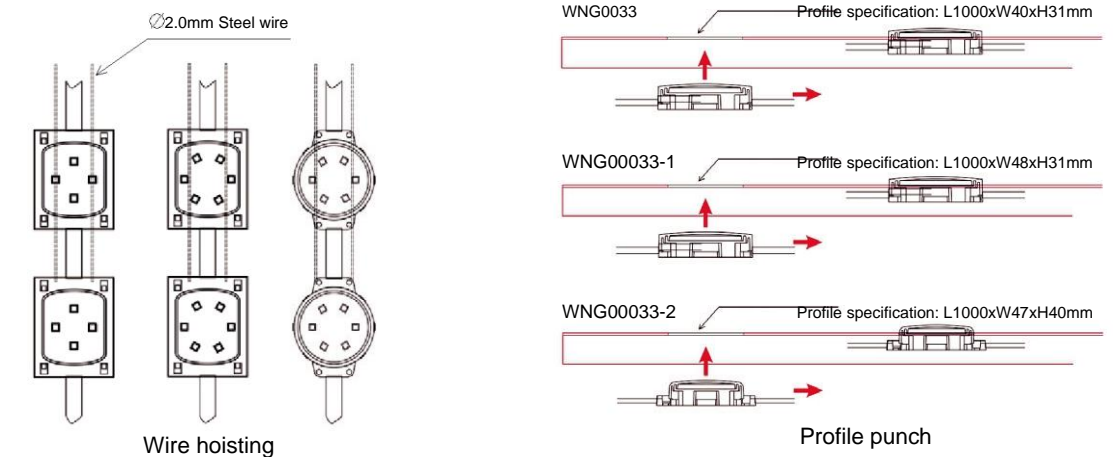






**WNG00018-3W**



Material: Aluminum+Acrylic  
 Voltage: AC220V  
 Power: 3W  
 Light source: OSRAM  
 CCT: 3000K/4000K/6000K  
 Safety Classification: Class I  
 Driver: Built-in driver  
 Control mode: Switch  
 Working temps: -20°C~45°C




Beam Angle:



**WNG00018-4W**



Material: Aluminum+Acrylic  
 Voltage: AC220V  
 Power: 4W  
 Light source: OSRAM  
 CCT: 3000K/4000K/6000K  
 Safety Classification: Class I  
 Driver: Built-in driver  
 Control mode: Switch  
 Working temps: -20°C~45°C




Beam Angle:



**WNG00015-3W**



Material: Aluminum+Acrylic  
 Voltage: DC24V  
 Power: 3W  
 Light source: OSRAM  
 CCT: 3000K/4000K/6000K  
 Driver: Built-in driver  
 Control mode: Switch  
 Working temps: -20°C~45°C




Beam Angle:



**WNG00015-7W**



Material: Aluminum+Acrylic  
 Voltage: DC24V  
 Power: 7W  
 Light source: OSRAM  
 CCT: 3000K/4000K/6000K  
 Driver: Built-in driver  
 Control mode: Switch  
 Working temps: -20°C~45°C




Beam Angle:



**WNG00014-6W**



Material: Aluminum+PC  
 Voltage: DC24V  
 Power: 6W  
 Light source: OSRAM  
 CCT: 3000K/4000K/6000K  
 Driver: Built-in driver  
 Control mode: Switch  
 Working temps: -20°C~45°C




Beam Angle:



**WNG00014-9W**




Material: Aluminum+PC  
 Voltage: DC24V  
 Power: 9W  
 Light source: OSRAM  
 CCT: 3000K/4000K/6000K  
 Driver: Built-in driver  
 Control mode: Switch  
 Working temps: -20°C~45°C




Beam Angle:



Cross glow position

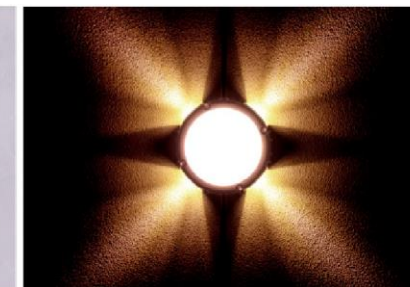

Lighting effect

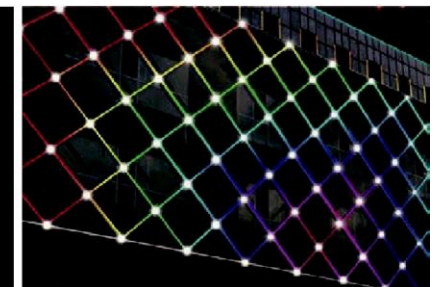


Application scenarios



**WNG00032**



Material: Aluminum+Acrylic  
 Voltage: DC24V  
 Power: 1.2W  
 Light source: OSRAM 5050x6  
 CCT: 3000K/4000K/6000K  
 Driver: Remote driver  
 Control mode: Switch  
 Working temps: -20°C~45°C




Beam Angle:



**WNG00032-1**



Material: Aluminum+Acrylic  
 Voltage: DC24V  
 Power: 1.2W  
 Light source: OSRAM 5050x6  
 CCT: RGB 3 in 1  
 Driver: Remote driver  
 Control mode: DMX512  
 Working temps: -20°C~45°C




Beam Angle:



**WNG00025-3W**



Material: Aluminum+Acrylic  
 Voltage: AC220V  
 Power: 3W  
 Light source: CREE  
 CCT: 3000K/4000K/6000K  
 Driver: Remote driver  
 Control mode: Switch  
 Working temps: -20°C~45°C



Beam Angle:

