



OUTDOOR PROWINDUCT


WALL WASHER LIGHT SERIES

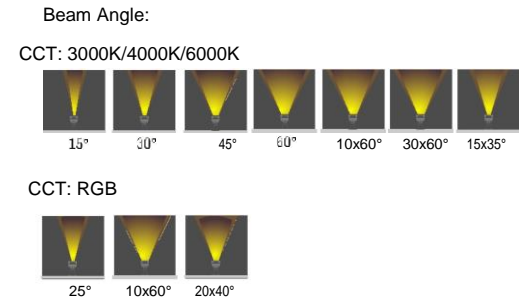


WNDX0043 / WNDX0044 / WNDX0045 / WNDX0048

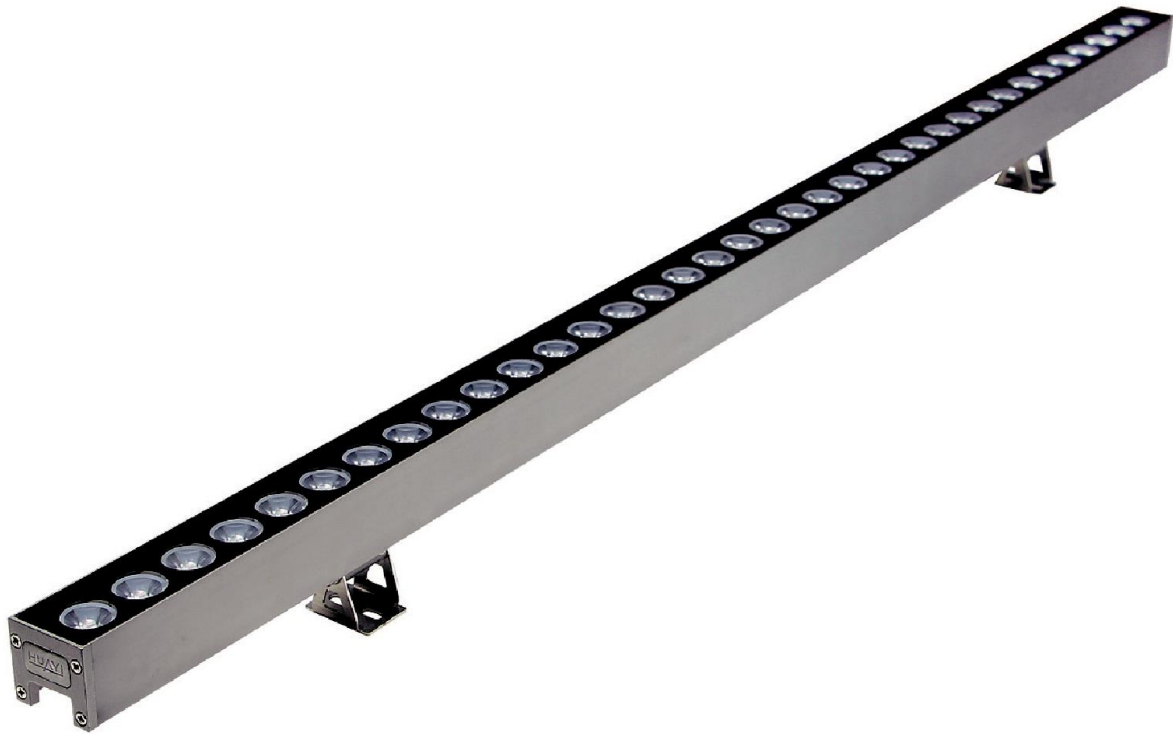


Item No.	Voltage	Material	Power	Light source	CCT	Control mode	Working temps
WNDX0043	DC24V	Aluminum+Toughened glass	18W	OSRAM SMD 18pcs	3000K/4000K/6000K/RGB	Switch/DMX512	-20°C/45°C
WNDX0044	DC24V	Aluminum+Toughened glass	24W	OSRAM SMD 24pcs	3000K/4000K/6000K/RGB	Switch/DMX512	-20°C/45°C
WNDX0045	DC24V	Aluminum+Toughened glass	36W	OSRAM SMD 36pcs	3000K/4000K/6000K/RGB	Switch/DMX512	-20°C/45°C
WNDX0048	DC24V	Aluminum+Toughened glass	48W	OSRAM SMD 48pcs	3000K/4000K/6000K/RGB	Switch/DMX512	-20°C/45°C

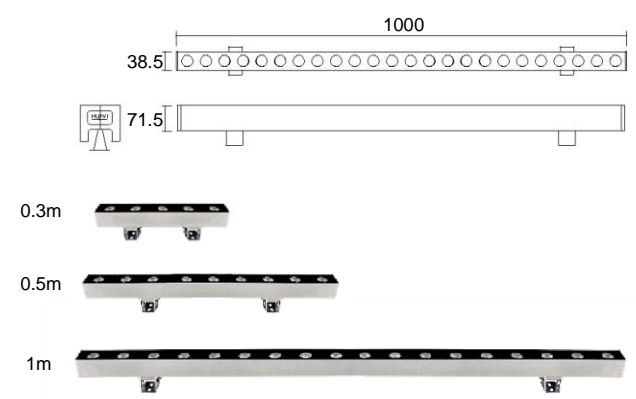

WNXQ00019 / WNXQ00020



I	I	Power	Light source	CCT	Dimension			I	Working temps
					L(mm)	W(mm)	H(mm)		
WNXQ00019-18W	DC24V	18W	OSRAM SMD 18pcs	3000K	1000	35	26	Switch	-20°C/45°C
WNXQ00019-24W	DC24V	24W	OSRAM SMD 24pcs	3000K	1000	35	26	Switch	-20°C/45°C
WNXQ00020-36W	DC24V	36W	OSRAM SMD 36pcs	3000K	1000	43	34	Switch	-20°C/45°C

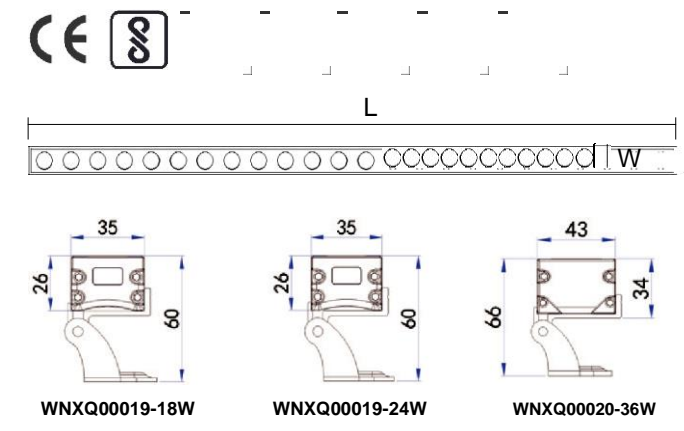




WNXQ00006 / WNXQ00007 / WNXQ00008 / WNXQ00009

Beam Angle:




I	Voltage	Power	Light source	CCT	Dimension			I	
					L(mm)	W(mm)	H(mm)		
WNXQ00006	DC24V	9W	EPISTAR SMD 9pcs	3000K/4000K/5000K	500	43	24	Switch	-20°C/45°C
WNXQ00007	DC24V	12W	EPISTAR SMD 12pcs	3000K/4000K/5000K	500	43	24	Switch	-20°C/45°C
WNXQ00008	DC24V	18W	EPISTAR SMD 18pcs	3000K/4000K/5000K	1000	43	24	Switch	-20°C/45°C
WNXQ00009	DC24V	24W	EPISTAR SMD 24pcs	3000K/4000K/5000K	1000	43	24	Switch	-20°C/45°C


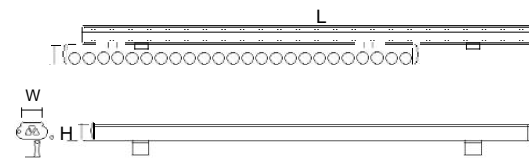


WNXQ00016 / WNXQ00017 / WNXQ00018

Beam Angle:



I	Voltage	Power	Light source	CCT	Dimension			I	
					L(mm)	W(mm)	H(mm)		
WNXQ00016	DC24V	18W	OSRAM SMD 18pcs	3000K/4000K/5700K	1000	43	35	Switch	-20°C/45°C
WNXQ00017	DC24V	24W	OSRAM SMD 24pcs	3000K/4000K/5700K	1000	43	35	Switch	-20°C/45°C
WNXQ00018	DC24V	36W	OSRAM SMD 36pcs	3000K/4000K/5700K	1000	43	35	Switch	-20°C/45°C

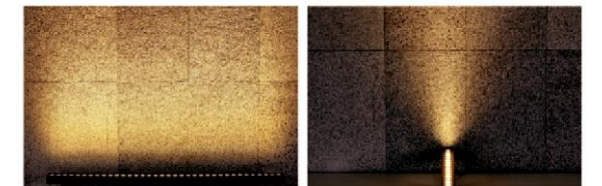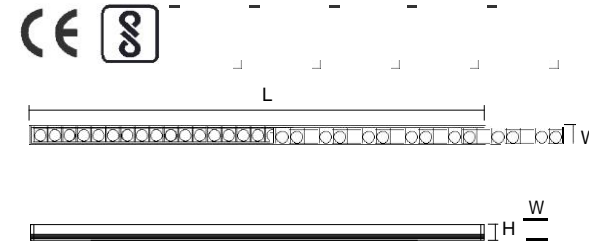


Horizontal light

Vertical light



Built-in anti-dazzle suite

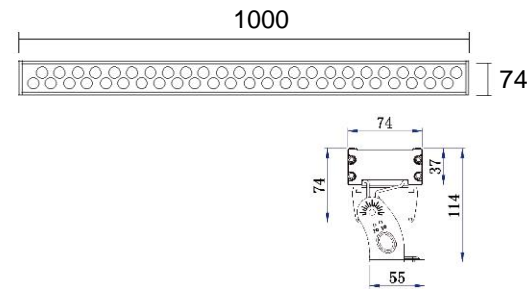


WNXQ00021



Material: Aluminum+Toughened glass
 Voltage: DC24V
 Power: 72W
 Light source: OSRAM SMD 24pcs
 CCT: 3000K
 Dimension: L1000xW74xH74mm
 Safety Classification: Class III
 Driver: Remote driver
 Control mode: Switch
 Working temps: -20°C/45°C



Beam Angle:

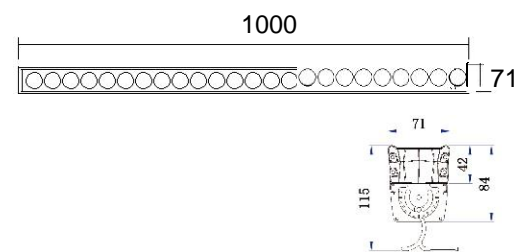

WNXQ00024



Material: Aluminum+Toughened glass
 Voltage: DC24V
 Power: 72W
 Light source: OSRAM SMD 24pcs
 CCT: 3000K
 Dimension: L1000xW71xH84mm
 Safety Classification: Class III
 Driver: Remote driver
 Control mode: Switch
 Working temps: -20°C/45°C



Beam Angle:

