

OUTDOOR PROWINDUCT



LINEAR LIGHT SERIES



WNDL0061






Material: Aluminum+PC
 Voltage: DC24V
 Power: 12W
 Light source: EPISTAR 60PCS
 CCT: 3000K/4000K/6000K/RGB 3 in 1
 Safety Classification: Class III
 Driver: Remote driver
 Control mode: Switch/DMX512
 Working temps: -20°C~45°C

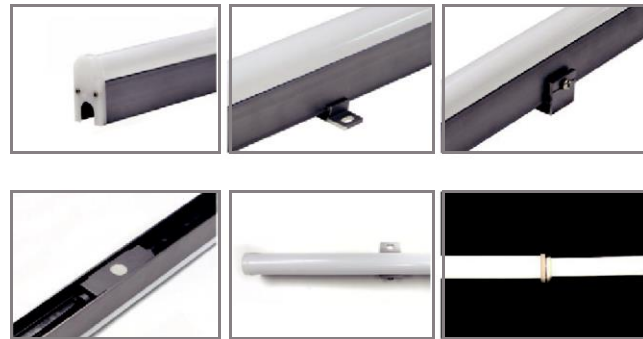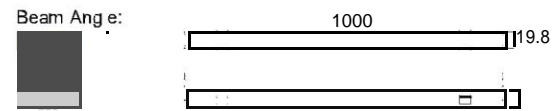

WNDL0062





Material: Aluminum+PC
 Voltage: DC24V
 Power: 12W
 Light source: EPISTAR 60PCS/EPISTAR 48PCS(RGB)
 CCT: 3000K/4000K/6000K/RGB 3 in 1
 Safety Classification: Class III
 Driver: Remote driver
 Control mode: Switch/DMX512
 Working temps: -20°C~45°C

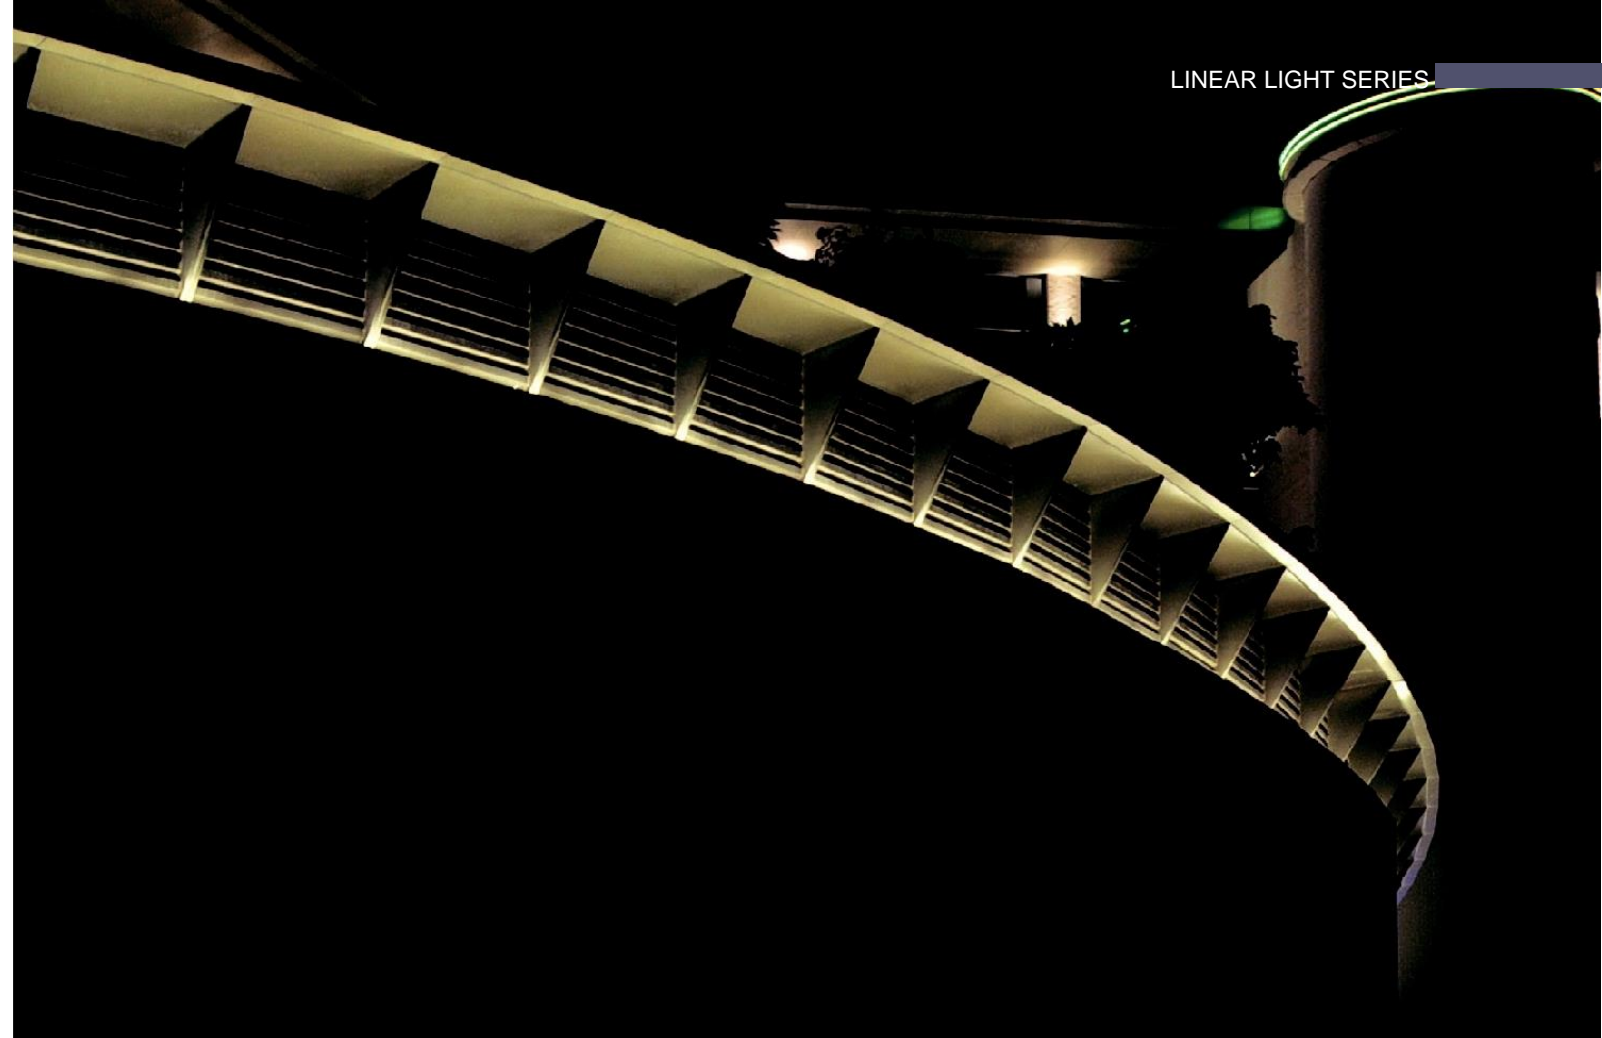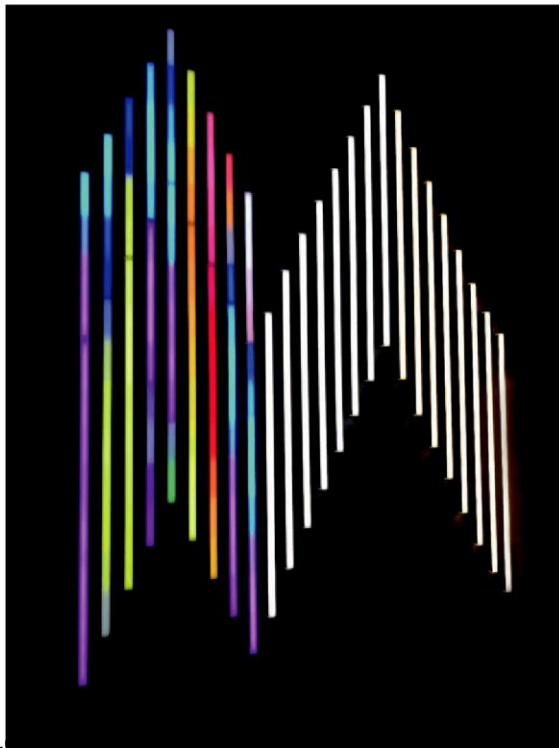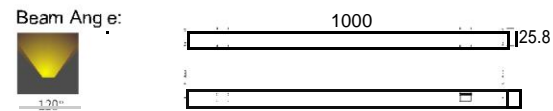


WNXT00005



Material: Aluminum+PC
 Voltage: DC24V
 Power: 12W
 Light source: EPISTAR 5730 LED
 CCT: 3000K/4000K/5000K
 Safety Classification: Class III
 Driver: Remote driver
 Control mode: Switch
 Working temps: -20°C~45°C

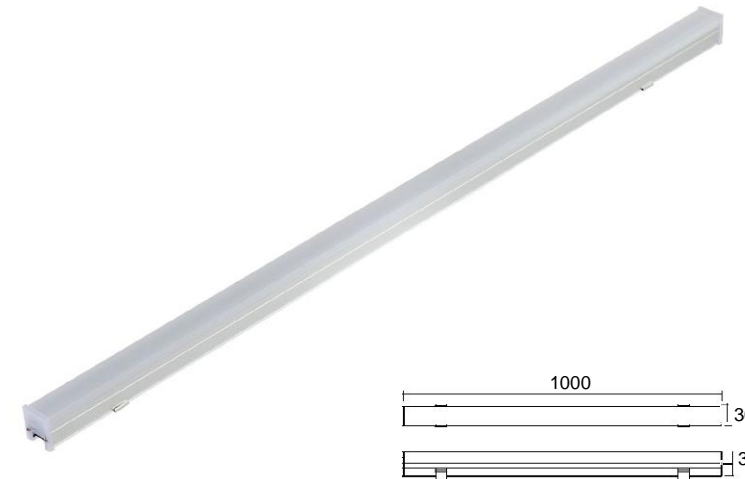

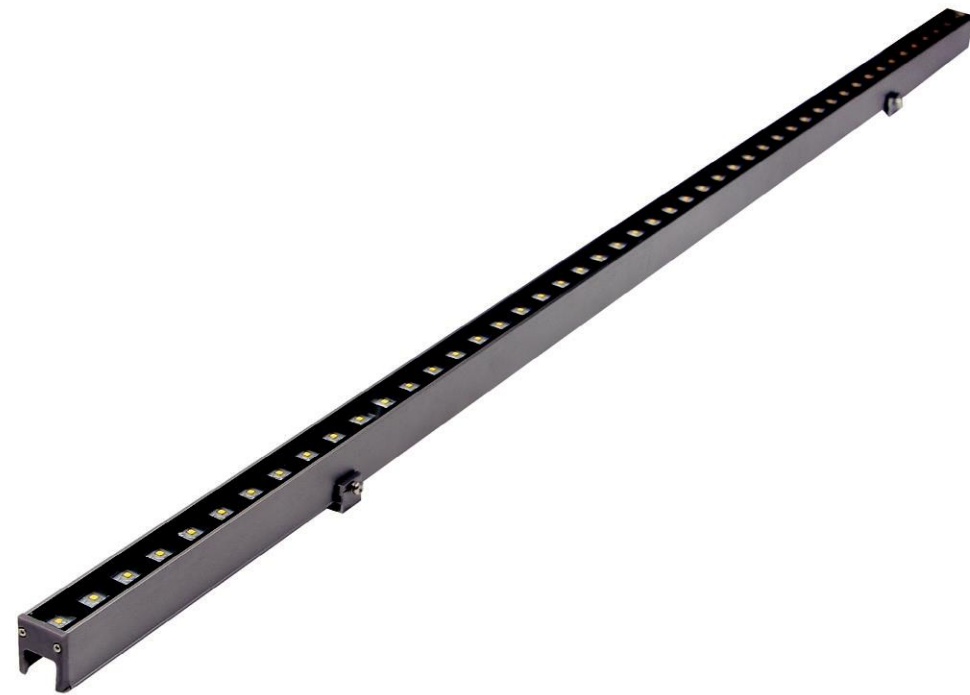

WNXT00004



Material: Aluminum+Toughened glass
 Voltage: DC24V
 Power: 12W
 Light source: EPISTAR 5050 LED
 CCT: 3000K/4000K/5000K
 Safety Classification: Class III
 Driver: Remote driver
 Control mode: Switch
 Working temps: -20°C~45°C



Beam Angle:




WNDL0075



Material: Aluminum+Toughened glass
 Voltage: DC24V
 Power: 12W
 Light source: EPISTAR 48PCS
 CCT: 3000K/4000K/6000K/RGB 3 in 1
 Safety Classification: Class III
 Driver: Remote driver
 Control mode: Switch/DMX512
 Working temps: -20°C~45°C



Beam Angle:

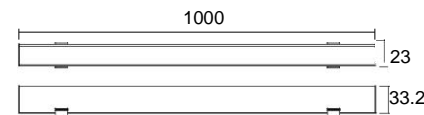

WNXT00007



Material: Aluminum+Toughened glass
 Voltage: DC24V
 Power: 12W
 Light source: EPISTAR 5050 LED
 CCT: 3000K/4000K/5700K
 Dimension: L1000xW50xH26mm
 Safety Classification: Class III
 Driver: Remote driver
 Control mode: Switch
 Working temps: -20°C~45°C



Beam Angle:

