

OUTDOOR PROWINDUCT

SPIKE LIGHT SERIES





WN-T764



Material: Aluminum+Toughened glass
 Voltage: AC220~240V
 Power: 5W
 Light source: CREE COB
 CCT: 3000K/4000K/6000K
 Safety Classification: Class I
 Driver: Built-in driver
 Control mode: Switch
 Working temps: -20°C~45°C



Beam Angle:

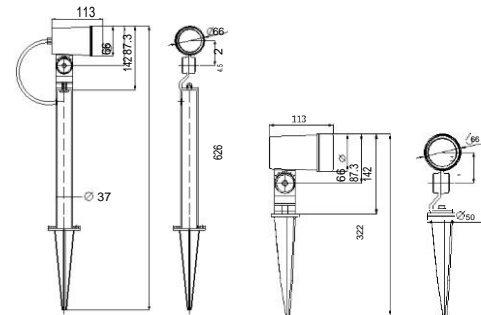


WNJA00006



Material: Aluminum+Toughened glass
 Voltage: AC220~240V 50Hz
 Power: 5W
 Light source: Epistar COB
 CCT: 3000K/4000K/6000K
 Safety Classification: Class I
 Driver: Built-in driver
 Control mode: Switch
 Working temps: -20°C~45°C



Beam Angle:

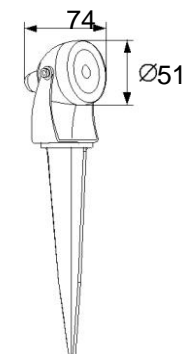




WNJA00004



Material: Aluminum+Toughened glass
 Voltage: DC12V
 Power: 5W
 Light source: CREE COB
 Light output: 720Lm
 CCT: 3000K/4000K/6000K
 Safety Classification: Class III
 Driver: Built-in driver
 Control mode: Switch
 Working temps: -20°C~45°C



Beam Angle:



WNJA00005



Material: Aluminum+Toughened glass
 Voltage: AC110~240V
 Power: 6W
 Light source: Edison COB
 CCT: 3000K/4000K/6000K
 Light output: 650Lm
 Safety Classification: Class I
 Driver: Built-in driver
 Control mode: Switch
 Working temps: -20°C~45°C

