INFO @ WONYGROUP.COM
MENAR KECK SENG, SUITE 33-01, 33RD FLOOR, BUKIT BINTANG ST, MALAYSIA, 55100 KUALA LUMPUR, MALAYSIA.
+60 3-2149 9347
+60 1111500301

LIGHTING CATALOG
2020 -2021

COMPANY PROFILE

Jiangmen Klonda Lighting and Electrical Co.,Ltd. is a high-tech enterprise, who focus on LED lighting for 12 years. We have our own LED packaging and LED lighting assembly divisions ,and we truly understand and use the core technology of LED lighting.We sells the Bulbs of SKD andfinished product around the world ,such as Egypt ,Iran,Turkey, Syria ,Russia and South America and so on .

The company is professional SMD manufacturer ,and we focus on 2835,5730 high voltage chip and COB /DOB .All the SMD material used PCT bracket , High RA 80 or 90, high lumen efficiency The lamp beads of our factory are passed LM80 certification and THD≤20, AC85-265V, PF0.9. Besides,We can according therequirement from customer ,and design the circuit board and driver for them . The company won the "National High-tech Enterprise""ISO9001 Quality System Certification","CE Certification","National 3C Compulsory Certification","ROSH"."Innovation is outlet ,Quality is our life , Speed is benefit ,Good service is fundamental "is our business philosophy .Meticulous products and serious is our claim .We create value for our customer and society constantly .

CATALOG

SMD Lamp Beads Series ---------- 01

The Cob Series ---------- 02

Ac Cob Series ---------- 03-08

Led A Bulb Lamp Series ---------- 09-12

Die Casting Bulb Series ---------- 13-14

T Bulb Series ---------- 15-26

Led Spot Light Series ---------- 27-28

Led Candle Light Series ---------- 29-30

Led Bars ---------- 31-34

Led Panel Light Series ---------- 35-36

EQUIPMENT





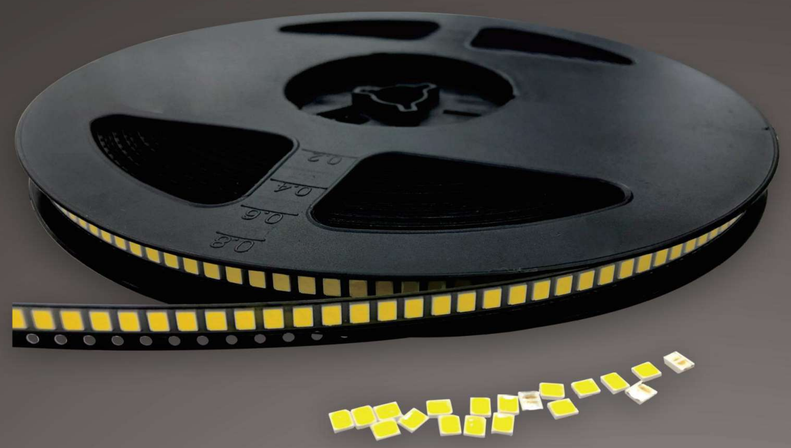

SMD : 2835 , 3030 , 5730 , 5050 , 3014

3V , 6V , 9V , 12V , 18V , 36V , 72V

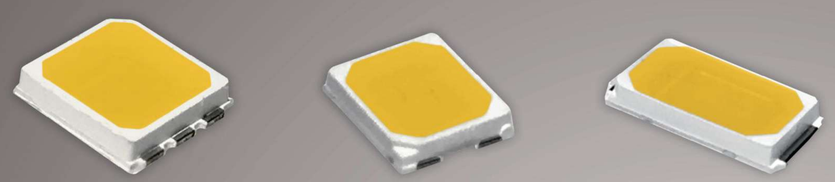

COB

COB : 3W,5W,7W,10W,15W,20W,30W,50W,100W

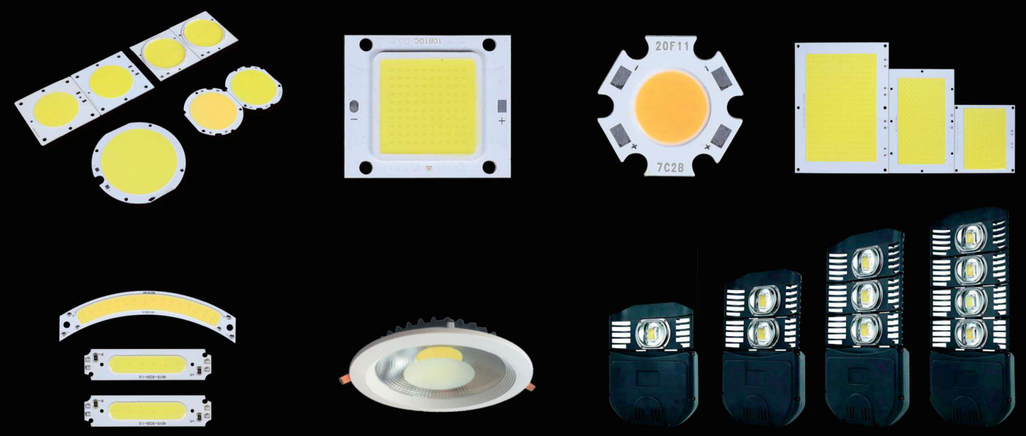

COB LAMP SERIES

PRODUCT FEATURES

- SMD2835,SMD5730,SMD5054 available
- PCT bracket for high temperature resistance and low light decay
- High Ra (Ra98)
- High lumen efficiency
- Welcome customization for special requirements

Item	Power	Size	Luminous surface	BC	Voltage	Current	Lumens	Ra	Pcb thickness	Thermal Conductivity	Application
7660	20W	76*70mm	60MM	2B25C	75V	300mA	100lm/w	80/90/98	1.0MM	1.0	Floodlight
7660	30W	76*70mm	60MM	2B25C	105V	300mA	100lm/w	80/90/98	1.0MM	1.0	Floodlight
7660	50W	76*70mm	60MM	12B10C	30V	1800mA	100lm/w	80/90/98	1.5MM	1.0	Floodlight
7660	50W	76*70mm	60MM	4B25C	75V	600mA	100lm/w	80/90/98	1.5MM	1.0	Floodlight
WNL-COB-54*54	30W	54*54MM	42MM	2B30C	90V	300mA	100lm/w	80/90/98	1.0MM	1.0	Downlight
WNL-COB-54*46	30W	54*46MM	42MM	2B30C	90V	300mA	100lm/w	80/90/98	1.0MM	1.0	Downlight
WNL-COB-40*41	15W	41*36MM	32MM	2B15C	45V	300mA	100lm/w	80/90/98	1.0MM	1.0	Downlight
COB	3/5/7W	39*39MM	15MM	1B70C	220V	125mA	80lm/w	80/90/98	1.2MM	2.0	Cup

AC COB SERIES

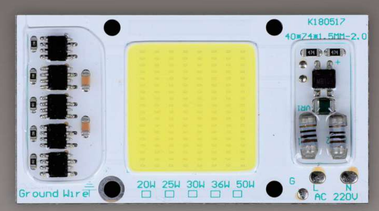

30W/50W
Anti-surge 4KV

AC COB SERIES

15W/20W/30W/50W
Anti-surge 4KV

AC COB SERIES

3W/5W/7W
Anti-surge 2KV

AC COB SERIES

30W/50W/100W/150W/200W
Anti-surge 4KV

COB 球泡，专利产品

COB BULB PATENT PRODUCT

专利号：201830024384X
2017218267001

PRODUCT FEATURES

- Bulb series from 5W-22W
- High thermal conductivity PCB and life time longer
- High lumen efficiency with 100LM/W
- Working voltage from 85V to 265V
- Keep stable power after lighting up periods
- Surge protect 1.6KV



PRODUCT FEATURES

- Die casting housing
- High thermal conductivity and 1.5mm thicknesses PCB
- High lumen efficiency and high power
- Surge protect 4KV

Item	Power	Size	Light Source	Voltage	PF	CCT	Ra	Lumen	Holder	PCS/ CTN	CTN Size
WNL-A50	5W	A55*H88mm	COB	AC85-265V	0.5	6000-6500K 2700-3200K	80	100LM/W	E27/B22	100	580*300*225mm
WNL-A55	7W	A55*H102mm	COB	AC85-265V	0.5	6000-6500K 2700-3200K	80	100LM/W	E27/B22	100	580*300*225mm
WNL-A60	9W	A60*H111mm	COB	AC85-265V	0.5	6000-6500K 2700-3200K	80	100LM/W	E27/B22	100	640*330*245mm
WNL-A65	12W	A65*H135mm	COB	AC85-265V	0.5	6000-6500K 2700-3200K	80	100LM/W	E27/B22	100	680*350*285mm
WNL-A70	15W	A70*H143mm	COB	AC85-265V	0.5	6000-6500K 2700-3200K	80	100LM/W	E27/B22	100	730*375*310mm
WNL-A80	18W	A80*H147mm	COB	AC85-265V	0.5	6000-6500K 2700-3200K	80	100LM/W	E27/B22	50	424*424*318mm

Item	Power	Size	Light Source	Voltage	PF	CCT	Ra	Lumen	Holder	PCS/ CTN	CTN Size
WNL-T60-001	10W	T60*H123mm	COB	AC85-265V	0.9	6000-6500K 2700-3200K	80	100LM/W	E27/B22	100	320*320*513mm
WNL-T70-001	20W	T70*H130mm	COB	AC85-265V	0.9	6000-6500K 2700-3200K	80	100LM/W	E27/B22	100	375*375*545mm
WNL-T80-001	30W	T80*H150mm	COB	AC85-265V	0.9	6000-6500K 2700-3200K	80	100LM/W	E27/B22	50	445*445*332mm
WNL-T100-001	40W	T100*H180mm	COB	AC85-265V	0.9	6000-6500K 2700-3200K	80	100LM/W	E27/B22	30	535*326*390mm
WNL-T120-001	50W	T120*H210mm	COB	AC85-265V	0.9	6000-6500K 2700-3200K	80	100LM/W	E27/B22	30	635*387*462mm
WNL-T140-001	70W	T140*H220mm	COB	AC85-265V	0.9	6000-6500K 2700-3200K	80	100LM/W	E27/B22	30	735*44.8*495mm
WNL-T140H-001	90W	T140*H230mm	COB	AC85-265V	0.9	6000-6500K 2700-3200K	80	100LM/W	E27/B22	20	735*305*526mm

SKD

光学PC高透灯罩

Optical PC high permeable lampshade.

自主生产及研发芯片，高光效，无光衰，寿命长。

Automatic production line and self developed packaged with high lumen efficiency . Low light decay and more longer life span.

高精度恒流IC电源
艾华耐高温130℃电容

High precision constant current driver, for Aishi capacitor can maximum bear 130 degree.

PBT复合导热塑包铝灯体

PBT compound with aluminum cup inside for good heatsink.

B22/E27镀镍灯头

B22/E27 nickel plated lamp holder.

P45	A50	A55	A60	A65	A70	A80	A95
3W	5W	7W	9W	12W	15W	18W	22W

LED A BULB LAMP SERIES

PRODUCT FEATURES

- Bulb series from 5W-22W
- High thermal conductivity PCB and life time longer
- High lumen efficiency with 100LM/W
- Working voltage from 85V to 265V
- Keep stable power after lighting up periods
- Surge protect 1.6KV

Item	Power	Size	Voltage	PF	CCT	Ra	Lumen	Holder	PCS/ CTN	CTN Size
WNL-G45	3W	G45*H75.5mm	AC85-265V	0.5	6000-6500K 2700-3200K	80	100-110LM/W	E27/B22	100	245*245*332mm
WNL-A50	5W	A55*H102mm	AC85-265V	0.5	6000-6500K 2700-3200K	80	100-110LM/W	E27/B22	100	580*300*225mm
WNL-A55	7W	A55*H102mm	AC85-265V	0.5	6000-6500K 2700-3200K	80	100-110LM/W	E27/B22	100	580*300*225mm
WNL-A60	9W	A60*H116mm	AC85-265V	0.5	6000-6500K 2700-3200K	80	100-110LM/W	E27/B22	100	640*330*245mm
WNL-A65	12W	A65*H135mm	AC85-265V	0.5	6000-6500K 2700-3200K	80	100-110LM/W	E27/B22	100	680*350*285mm
WNL-A70	15W	A70*H138mm	AC85-265V	0.5	6000-6500K 2700-3200K	80	100-110LM/W	E27/B22	100	730*375*310mm
WNL-A80	18W	A80*H155mm	AC85-265V	0.5	6000-6500K 2700-3200K	80	100-110LM/W	E27/B22	50	424*424*318mm
WNL-A95	22W	A95*H183mm	AC85-265V	0.5	6000-6500K 2700-3200K	80	100-110LM/W	E27/B22	50	485*485*340mm

LED A BULB LAMP SERIES

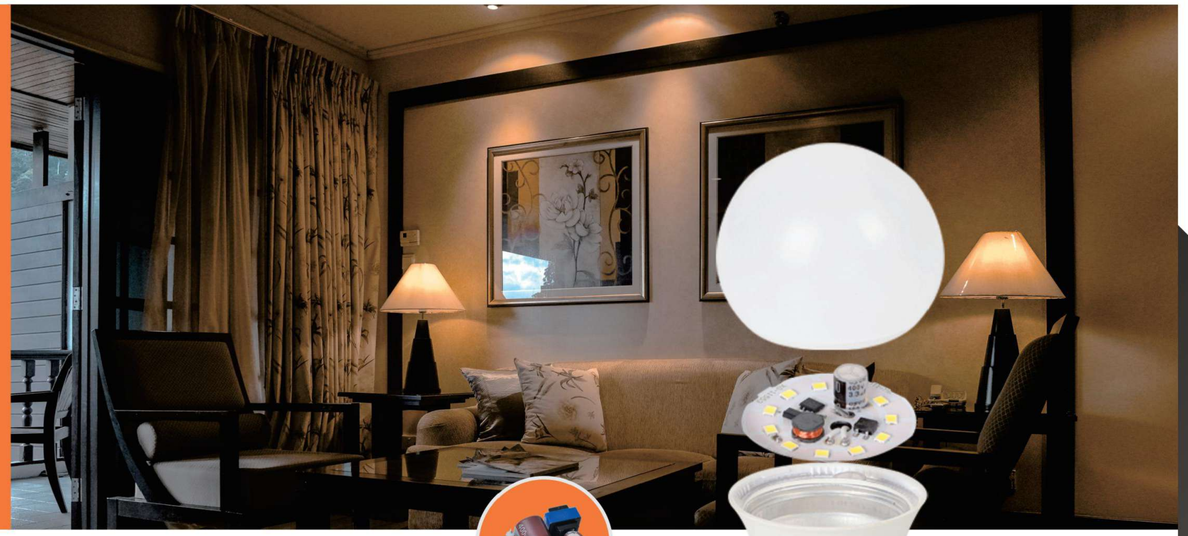

PRODUCT FEATURES

- 1.Bulb series from 5W-22W
- 2.High thermal conductivity PCB and life time longer
- 3.High lumen efficiency with 100LM/W
- 4.Working voltage from 85V to 265V
- 5.Keep stable power after lighting up periods
- 6.Surge protect 1.6KV



Item	Power	Size	Voltage	PF	CCT	Ra	Lumen	Holder	PCS/ CTN	CTN Size
WNL-G45	3W	G45*H75.5mm	AC85-265V	0.5	6000-6500K 2700-3200K	80	100-110LM/W	E27/B22	100	245*245*332mm
WNL-A50	5W	A55*H102mm	AC85-265V	0.5	6000-6500K 2700-3200K	80	100-110LM/W	E27/B22	100	580*300*225mm
WNL-A55	7W	A55*H102mm	AC85-265V	0.5	6000-6500K 2700-3200K	80	100-110LM/W	E27/B22	100	580*300*225mm
WNL-A60	9W	A60*H116mm	AC85-265V	0.5	6000-6500K 2700-3200K	80	100-110LM/W	E27/B22	100	640*330*245mm
WNL-A65	12W	A65*H135mm	AC85-265V	0.5	6000-6500K 2700-3200K	80	100-110LM/W	E27/B22	100	680*350*285mm
WNL-A70	15W	A70*H138mm	AC85-265V	0.5	6000-6500K 2700-3200K	80	100-110LM/W	E27/B22	100	730*375*310mm
WNL-A80	18W	A80*H155mm	AC85-265V	0.5	6000-6500K 2700-3200K	80	100-110LM/W	E27/B22	50	424*424*318mm
WNL-A95	22W	A95*H183mm	AC85-265V	0.5	6000-6500K 2700-3200K	80	100-110LM/W	E27/B22	50	485*485*340mm

PRODUCT FEATURES

- Colorful bulb (Red,Blue,Yellow,Pink,Green,Orange)housing
- Decorated for holiday lighting
- High brightness and pure color

Item	Power	Size	Voltage	PF	CCT	Ra	Holder	PCS/ CTN	CTN Size
WNL-CLA	7W	A60*H107mm	AC85-265V	0.5	R/G/Y/B/PINK	80	E27/B22	100	580*300*225mm

SKD

High Power COB +SMD Bulb

90W 70W 50W 40W 30W 20W

DIE CASTING BULB SERIES

PRODUCT FEATURES

- 1.Die casting housing
- 2.High thermal conductivity and 1.5mm thicknesses PCB
- 3.High lumen efficiency and high power
- 4.Surge protect 4KV

Item	Power	Size	Voltage	PF	CCT	Ra	Lumen	Holder	PCS/ CTN	CTN Size
WNL-T60-002	10W	T60*H123mm	AC85-265V	0.5	6000-6500K 2700-3200K	80	100LM/W	E27/B22	100	320*320*513mm
WNL-T70-002	20W	T70*H130mm	AC85-265V	0.5	6000-6500K 2700-3200K	80	100LM/W	E27/B22	100	375*375*545mm
WNL-T80-002	30W	T80*H150mm	AC85-265V	0.5	6000-6500K 2700-3200K	80	100LM/W	E27/B22	50	445*445*332mm
WNL-T100-002	40W	T100*H180mm	AC85-265V	0.5	6000-6500K 2700-3200K	80	100LM/W	E27/B22	30	535*326*390mm
WNL-T120-002	50W	T120*H210mm	AC85-265V	0.5	6000-6500K 2700-3200K	80	100LM/W	E27/B22	30	635*387*462mm
WNL-T140-002	70W	T140*H220mm	AC85-265V	0.5	6000-6500K 2700-3200K	80	100LM/W	E27/B22	30	735*448*495mm
WNL-T140H-002	90W	T140*H230mm	AC85-265V	0.5	6000-6500K 2700-3200K	80	100LM/W	E27/B22	20	735*305*526mm

T BULB SERIES

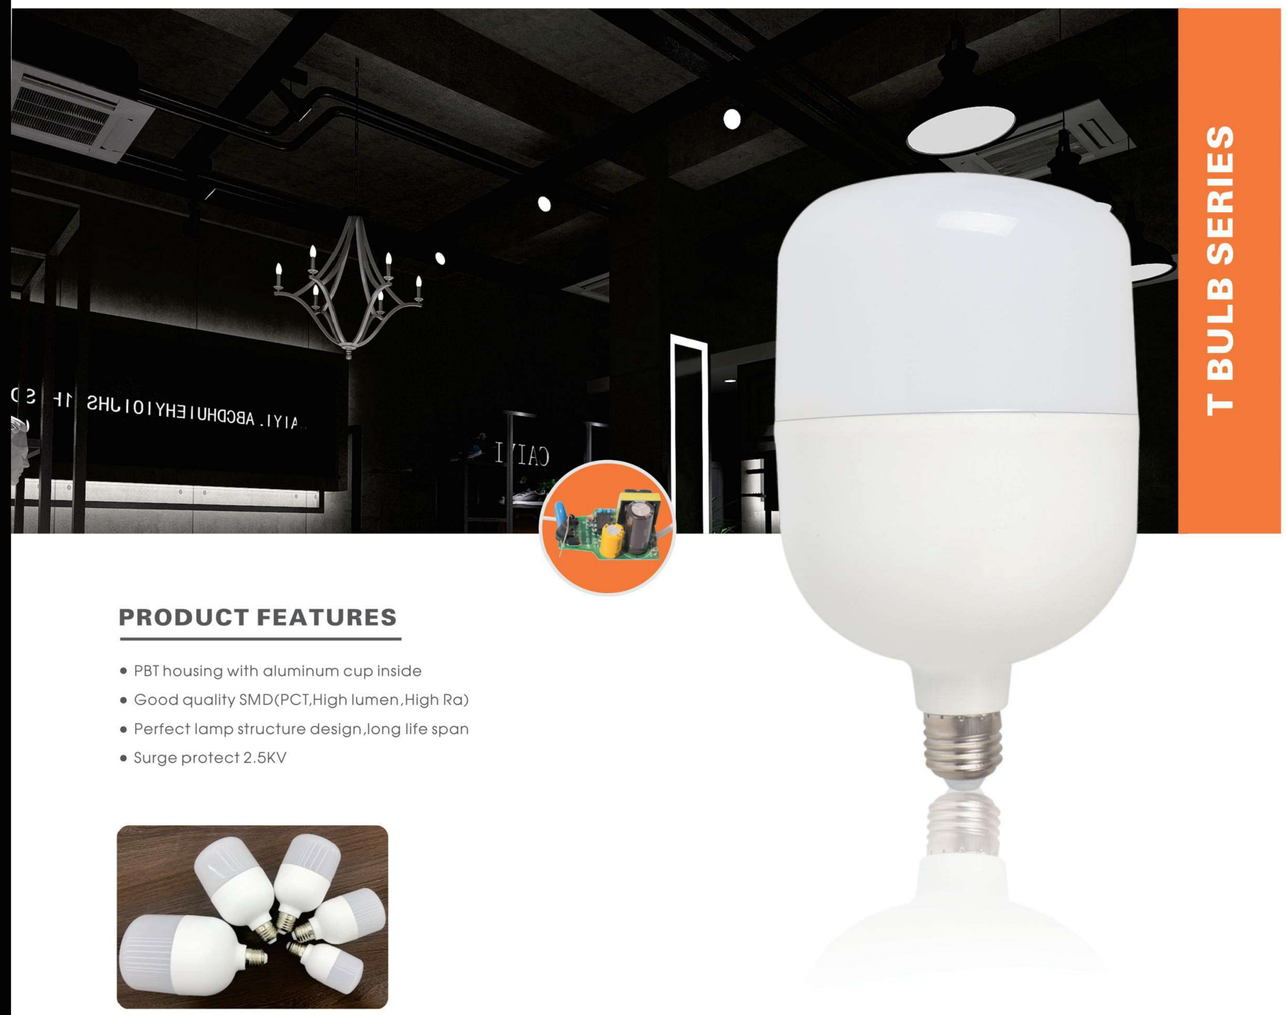

T BULB SERIES

PRODUCT FEATURES

- PBT housing with aluminum cup inside
- Good quality SMD(PCT,High lumen,High Ra)
- Perfect lamp structure design,long life span
- Surge protect 2.5KV

Item	Power	Size	Voltage	PF	CCT	Ra	Lumen	Holder	PCS/ CTN	CTN Size
WNL-T50-003	5W	T50*H97mm	AC85-265V	0.5	6000-6500K 2700-3200K	80	100LM/W	E27/B22	100	580*300*225mm
WNL-T60-003	9W	T60*H115mm	AC85-265V	0.5	6000-6500K 2700-3200K	80	100LM/W	E27/B22	100	640*330*245mm
WNL-T70-003	12W	T70*H140mm	AC85-265V	0.5	6000-6500K 2700-3200K	80	100LM/W	E27/B22	100	370*370*567mm
WNL-T80-003	18W	T80*H155mm	AC85-265V	0.5	6000-6500K 2700-3200K	80	100LM/W	E27/B22	100	420*420*318mm
WNL-T100-003	28W	T100*H185mm	AC85-265V	0.5	6000-6500K 2700-3200K	80	100LM/W	E27/B22	30	525*321*384mm
WNL-T120-003	38W	T120*H210mm	AC85-265V	0.5	6000-6500K 2700-3200K	80	100LM/W	E27/B22	30	625*381*444mm
WNL-T140-003	48W	T135*H270mm	AC85-265V	0.5	6000-6500K 2700-3200K	80	100LM/W	E27/B22	20	700*293*488mm

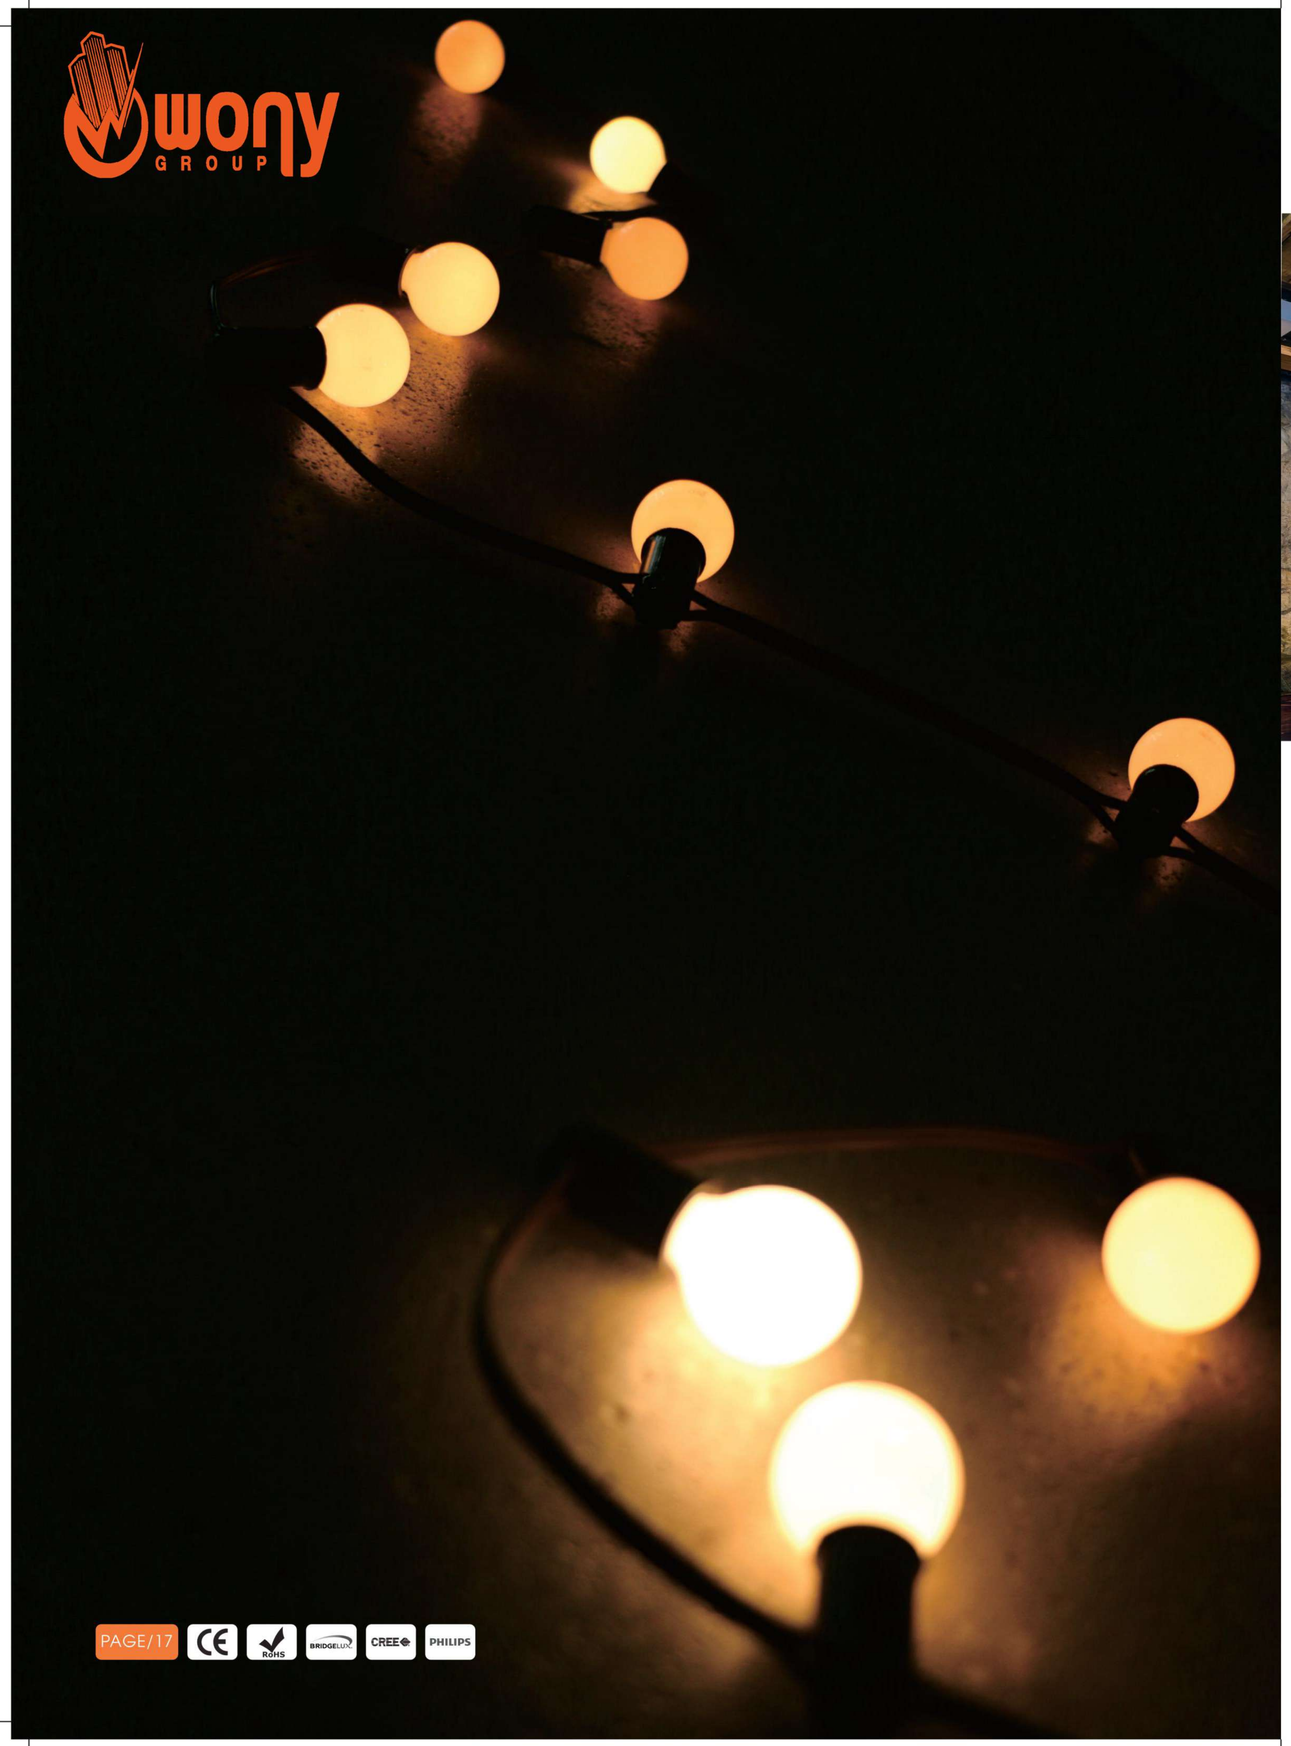

T BULB SERIES

PRODUCT FEATURES

- PBT housing with aluminum cup inside
- Good quality SMD(PCT,High lumen,High Ra)
- Perfect lamp structure design,long life span
- Surge protect 2.5KV

9W 12W 18W 28W 38W 48W

Item	Power	Size	Voltage	PF	CCT	Ra	Lumen	Holder	PCS/ CTN	CTN Size
WNL-T60-004	9W	T60*H111mm	AC85-265V	0.5	6000-6500K 2700-3200K	80	100LM/W	E27/B22	100	640*330*245mm
WNL-T70-004	12W	T70*H125mm	AC85-265V	0.5	6000-6500K 2700-3200K	80	100LM/W	E27/B22	100	370*370*567mm
WNL-T80-004	18W	T80*H143mm	AC85-265V	0.5	6000-6500K 2700-3200K	80	100LM/W	E27/B22	100	420*420*318mm
WNL-T100-004	28W	T100*H170mm	AC85-265V	0.5	6000-6500K 2700-3200K	80	100LM/W	E27/B22	30	525*321*384mm
WNL-T120-004	38W	T120*H200mm	AC85-265V	0.5	6000-6500K 2700-3200K	80	100LM/W	E27/B22	30	625*381*444mm
WNL-T140-004	48W	T140*H230mm	AC85-265V	0.5	6000-6500K 2700-3200K	80	100LM/W	E27/B22	20	700*293*488mm

T BULB SERIES

T BULB SERIES

PRODUCT FEATURES

- PBT housing with aluminum cup inside
- Good quality SMD(PCT,High lumen,High Ra)
- Perfect lamp structure design,long life span
- Surge protect 2.5KV

9W 12W 18W 28W 38W 48W

Item	Power	Size	Voltage	PF	CCT	Ra	Lumen	Holder	PCS/ CTN	CTN Size
WNL-T60-005	9W	T60*H110mm	AC85-265V	0.5	6000-6500K 2700-3200K	80	100LM/W	E27/B22	100	640*330*245mm
WNL-T70-005	12W	T70*H125mm	AC85-265V	0.5	6000-6500K 2700-3200K	80	100LM/W	E27/B22	100	370*370*567mm
WNL-T80-005	18W	T80*H135mm	AC85-265V	0.5	6000-6500K 2700-3200K	80	100LM/W	E27/B22	100	420*420*318mm
WNL-T100-005	28W	T100*H168mm	AC85-265V	0.5	6000-6500K 2700-3200K	80	100LM/W	E27/B22	30	525*321*384mm
WNL-T125-005	38W	T120*H198mm	AC85-265V	0.5	6000-6500K 2700-3200K	80	100LM/W	E27/B22	30	625*381*444mm
WNL-T135-005	48W	T135*H225mm	AC85-265V	0.5	6000-6500K 2700-3200K	80	100LM/W	E27/B22	20	700*293*488mm

T BULB SERIES

T BULB SERIES

PRODUCT FEATURES

- PBT housing with aluminum cup inside
- Good quality SMD(PCT,High lumen,High Ra)
- Perfect lamp structure design,long life span
- Surge protect 2.5KV

Item	Power	Size	Voltage	PF	CCT	Ra	Lumen	Holder
WNL-UFO-T130	25W	130*H126mm	AC85-265V	0.5	6000-6500K 2700-3200K	80	100LM/W	E27/B22
WNL-UFO-T150	42W	150*H127mm	AC85-265V	0.5	6000-6500K 2700-3200K	80	100LM/W	E27/B22
WNL-UFO-T170	55W	170*H140mm	AC85-265V	0.5	6000-6500K 2700-3200K	80	100LM/W	E27/B22
WNL-UFO-T190	60W	195*H142mm	AC85-265V	0.5	6000-6500K 2700-3200K	80	100LM/W	E27/B22

T BULB SERIES

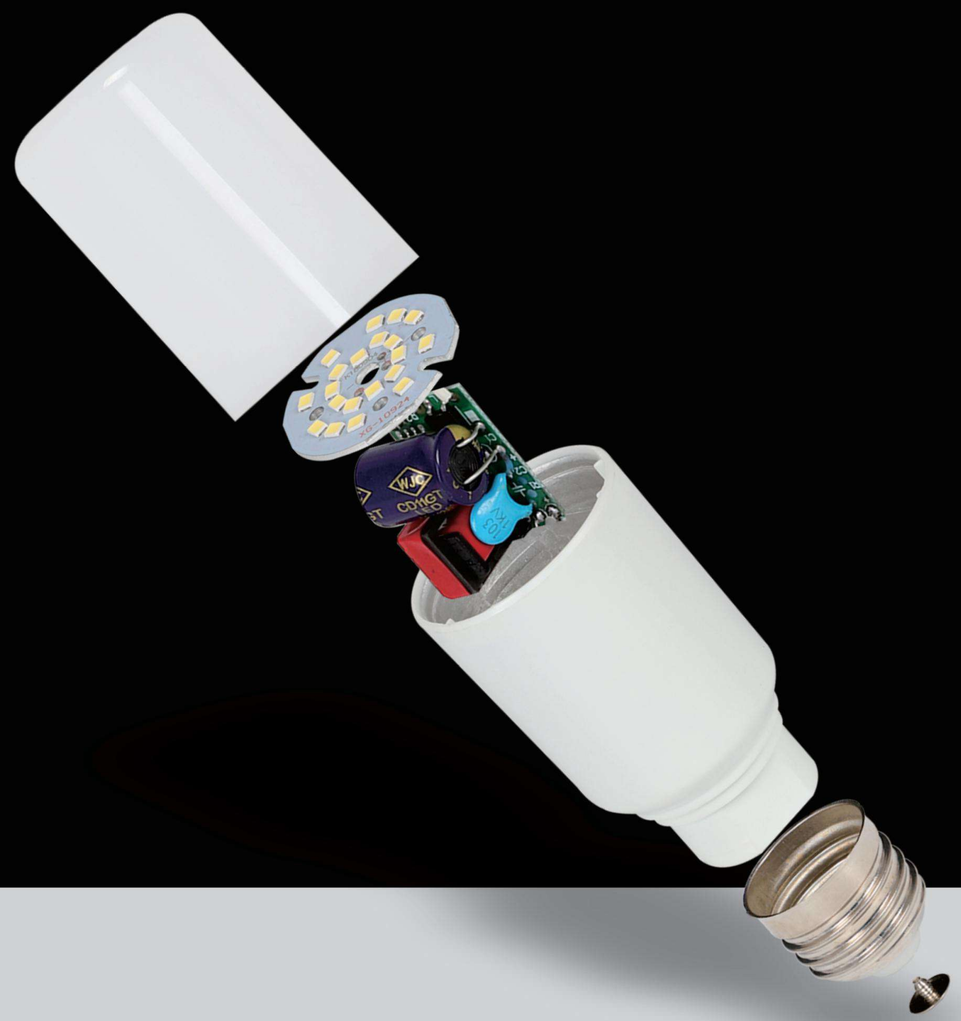

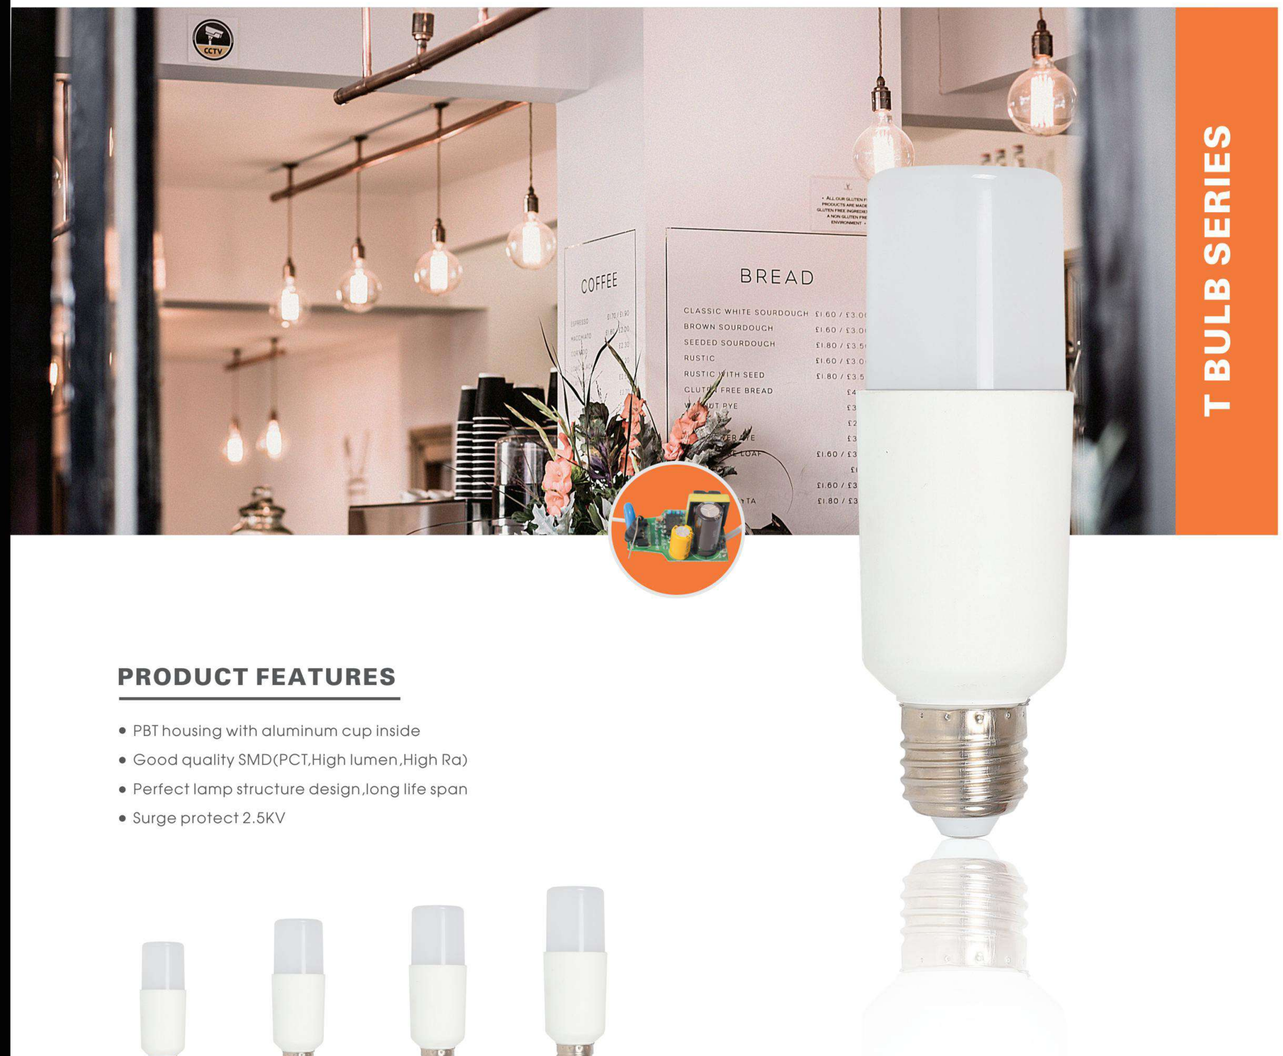

T BULB SERIES

PRODUCT FEATURES

- PBT housing with aluminum cup inside
- Good quality SMD(PCT,High lumen,High Ra)
- Perfect lamp structure design,long life span
- Surge protect 2.5KV

6W 9W 12W 15W

Item	Power	Size	Voltage	PF	CCT	Ra	Lumen	Holder	PCS/ CTN	CTN Size
WNL-G11-6W	6W	37*105mm	AC85-265V	0.5	6000-6500K 2700-3200K	80	100LM/W	E27/B22	200	402*424*464mm
WNL-G11-9W	9W	37*115mm	AC85-265V	0.5	6000-6500K 2700-3200K	80	100LM/W	E27/B22	200	402*424*490mm
WNL-G11-12W	12W	44*138mm	AC85-265V	0.5	6000-6500K 2700-3200K	80	100LM/W	E27/B22	100	485*254*300mm
WNL-G11-15W	15W	51*145mm	AC85-265V	0.5	6000-6500K 2700-3200K	80	100LM/W	E27/B22	100	636*328*248mm

T BULB SERIES

T BULB SERIES

PRODUCT FEATURES

- PBT housing with aluminum cup inside
- Good quality SMD(PCT,High lumen,High Ra)
- Perfect lamp structure design,long life span
- Surge protect 2.5KV

20W

30W

Item	Power	Size	Light Source	Voltage	PF	CCT	Ra	Lumen	Holder
WNL-PAR20	20W	Ø95*H120mm	COB	AC85-265V	0.5	6000-6500K 2700-3200K	80	100LM/W	E27/B22
WNL-PAR30	30W	Ø95*H120mm	COB	AC85-265V	0.5	6000-6500K 2700-3200K	80	100LM/W	E27/B22

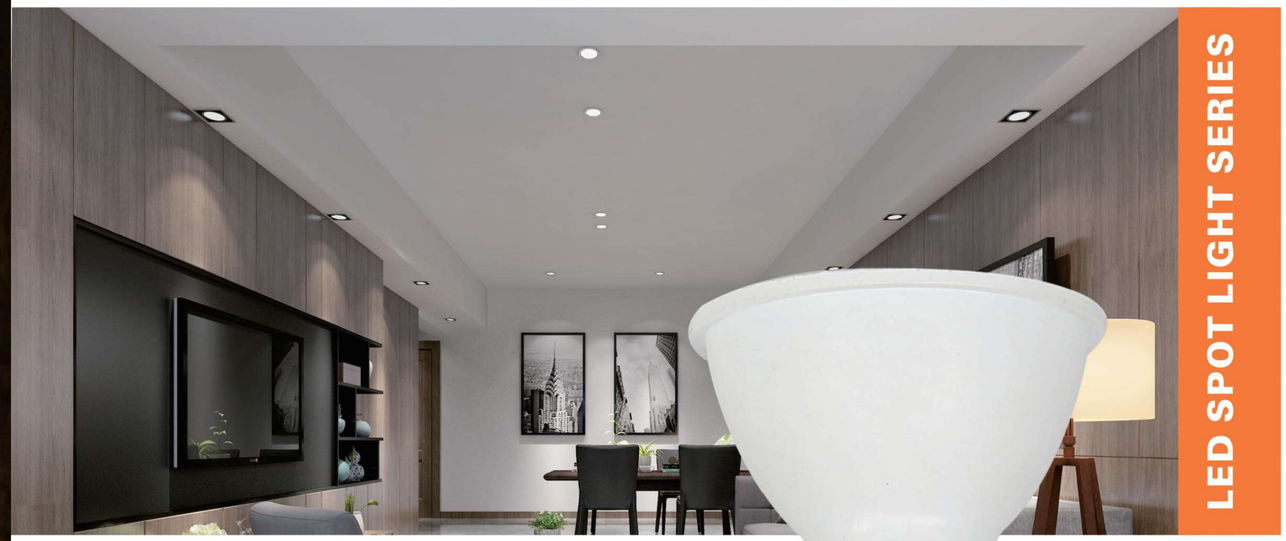

LED SPOT LIGHT SERIES

PRODUCT FEATURES

- GU10,MR16 and GU5.3
- Small housing with high power
- High brightnes
- Dimmable
- COB light source with various colors

Item	Power	Size	Voltage	PF	CCT	Ra	Lumen	Holder	PCS/ CTN	CTN Size
WNL-CUP-5W	5W	Ø50*H51mm	DC12V/ AC85-265V	0.5	6000-6500K 2700-3200K	80	80-90LM/W	MR16/GU10 /GU5.3	200	521*270*232mm
WNL-CUP-5W-02	5W	Ø50*H51mm	AC85-265V	0.5	6000-6500K 2700-3200K	80	80-90LM/W	MR16/GU10 /GU5.3	200	521*270*232mm
WNL-CUP-7W	7W	Ø50*H53mm	AC85-265V	0.5	6000-6500K 2700-3200K	80	80-90LM/W	MR16/GU10 /GU5.3	200	521*270*232mm
WNL-CUP-7W-02	7W	Ø50*H53mm	AC85-265V	0.5	6000-6500K 2700-3200K	80	80-90LM/W	MR16/GU10 /GU5.3	200	521*270*232mm

LED CANDLE LIGHT SERIES

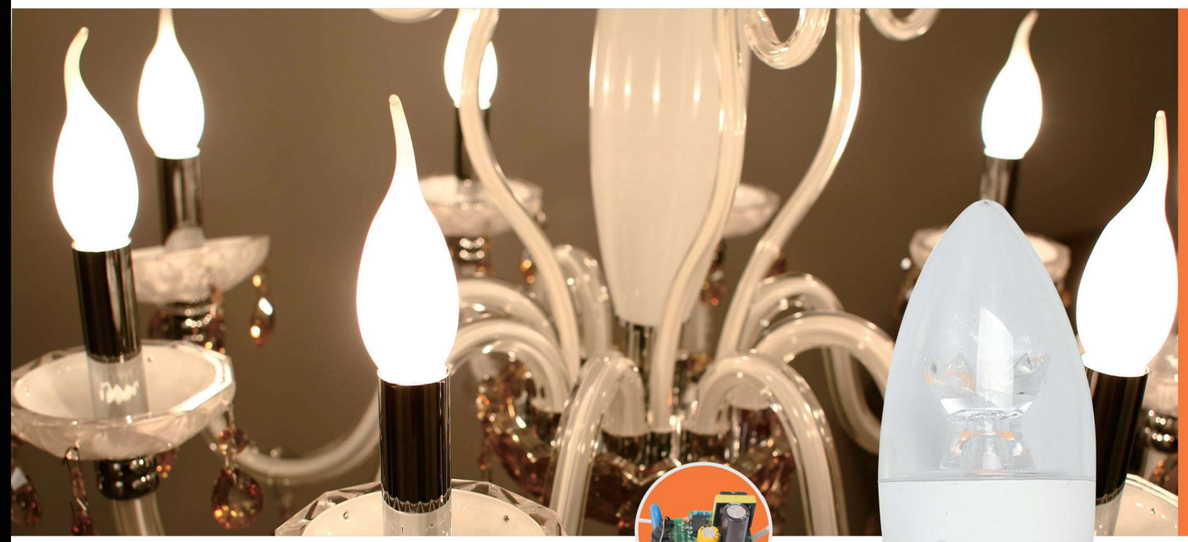

LED CANDLE LIGHT SERIES

PRODUCT FEATURES

- PBT housing and PC cover
- Small housing with high power
- High brightness
- Dimmable
- COB light source with various colors

7W 7W 7W 7W

Item	Power	Cover	Voltage	PF	CCT	Ra	Lumen	Holder	PCS/ CTN	CTN Size
WNL-CA-C	7W	CLEAR	AC85-265V	0.5	6000-6500K 2700-3200K	80	80-90LM/W	E14	200	402*211*473mm
WNL-CA-M	7W	MILKY	AC85-265V	0.5	6000-6500K 2700-3200K	80	80-90LM/W	E14	200	402*211*473mm
WNL-CA-CT	7W	CLEAR WITH TAIL	AC85-265V	0.5	6000-6500K 2700-3200K	80	80-90LM/W	E14	200	402*211*473mm
WNL-CA-MT	7W	MILKY WITH TAIL	AC85-265V	0.5	6000-6500K 2700-3200K	80	80-90LM/W	E14	200	402*211*473mm

LED BARS

LED BARS

PRODUCT FEATURES

- Application:Closet,display case,background profile
- AC220V directly and no need power supply
- Dimmable
- High brightness



Item	Power	Size	Voltage	CCT	Ra	Lumen	PCS/ CTN	CTN Size
WNL-220V DOB LINES-30	5.5W	30mm	AC200-240V	6000-6500K 2700-3200K	80	580LM	600	650*210*310mm
WNL-220V DOB LINES-60	8.5W	60mm	AC200-240V	6000-6500K 2700-3200K	80	800LM	300	650*210*310mm
WNL-220V DOB LINES-100	10.8W	100mm	AC200-240V	6000-6500K 2700-3200K	80	1200LM	100	110*170*125mm
WNL-220V Non-isolated DOB LINES-30	5W	30mm	AC165-265V	6000-6500K 2700-3200K	80	500LM	600	650*210*310mm
WNL-220V Non-isolated DOB LINES-60	9.5W	60mm	AC165-265V	6000-6500K 2700-3200K	80	1100LM	300	650*210*310mm
WNL-220V Non-isolated DOB LINES-100	12.5W	100mm	AC165-265V	6000-6500K 2700-3200K	80	1700LM	100	110*170*125mm
WNL-220V Multi-color DOB LINES	10W	100mm	AC200-240V	6000-6500K 2700-3200K	80	W:1400LM NW:1600LM WW:1400LM	100	110*170*125mm

LED BARS

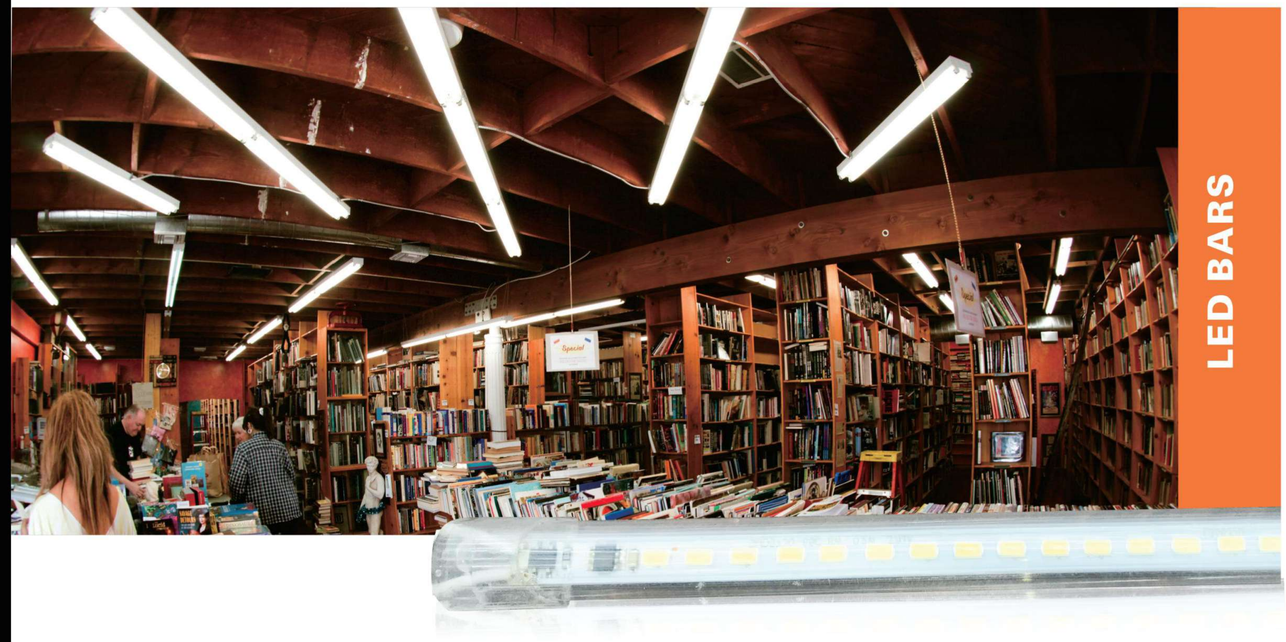

LED BARS

PRODUCT FEATURES

- Application:Closet,display case,background profile
- AC220V directly and no need power supply
- Dimmable
- High brightness

Item	Power	Size	Voltage	CCT	Ra	Lumen	PCS/ CTN	CTN Size
WNL-220V Waterproof DOB LINES-1	6W	30mm	AC220V	6000-6500K 2700-3200K	80	400LM	600	650*210*310mm
WNL-220V Waterproof DOB LINES-2	8W	60mm	AC220V	6000-6500K 2700-3200K	80	550LM	300	650*200*310mm
WNL-220V Waterproof DOB LINES-3	11W	100mm	AC220V	6000-6500K 2700-3200K	80	900LM	100	110*170*125mm

LED PANEL LIGHT SERIES

LED PANEL LAMP SERIES

PRODUCT FEATURES

- Suitable for home and commercial lighting
- Up to 90% energy saving compare to traditional lighting
- Long life with average life up to 15000hours
- Unique optical design and no dizzy light
- Environmental friendly no UV light

Item	Power	Size	Voltage	PF	CCT	Ra	Lumen	PCS/ CTN	CTN Size
WNL-PANEL-300*300	15W	300*300mm	AC160-260V	0.5	6000-6500K 2700-3200K	80	100LM/W	20	445*325*637mm
WNL-PANEL-300*600	30W	300*600mm	AC160-260V	0.5	6000-6500K 2700-3200K	80	100LM/W	10	445*325*637mm

wony
GROUP

SAVE TODAY,
SURVIVE TOMORROW,
LIVE SMART

WWW.WONYGROUP.COM